
RC-M
TRANSMITTER

PUSH BUTTON
24V- LEDS

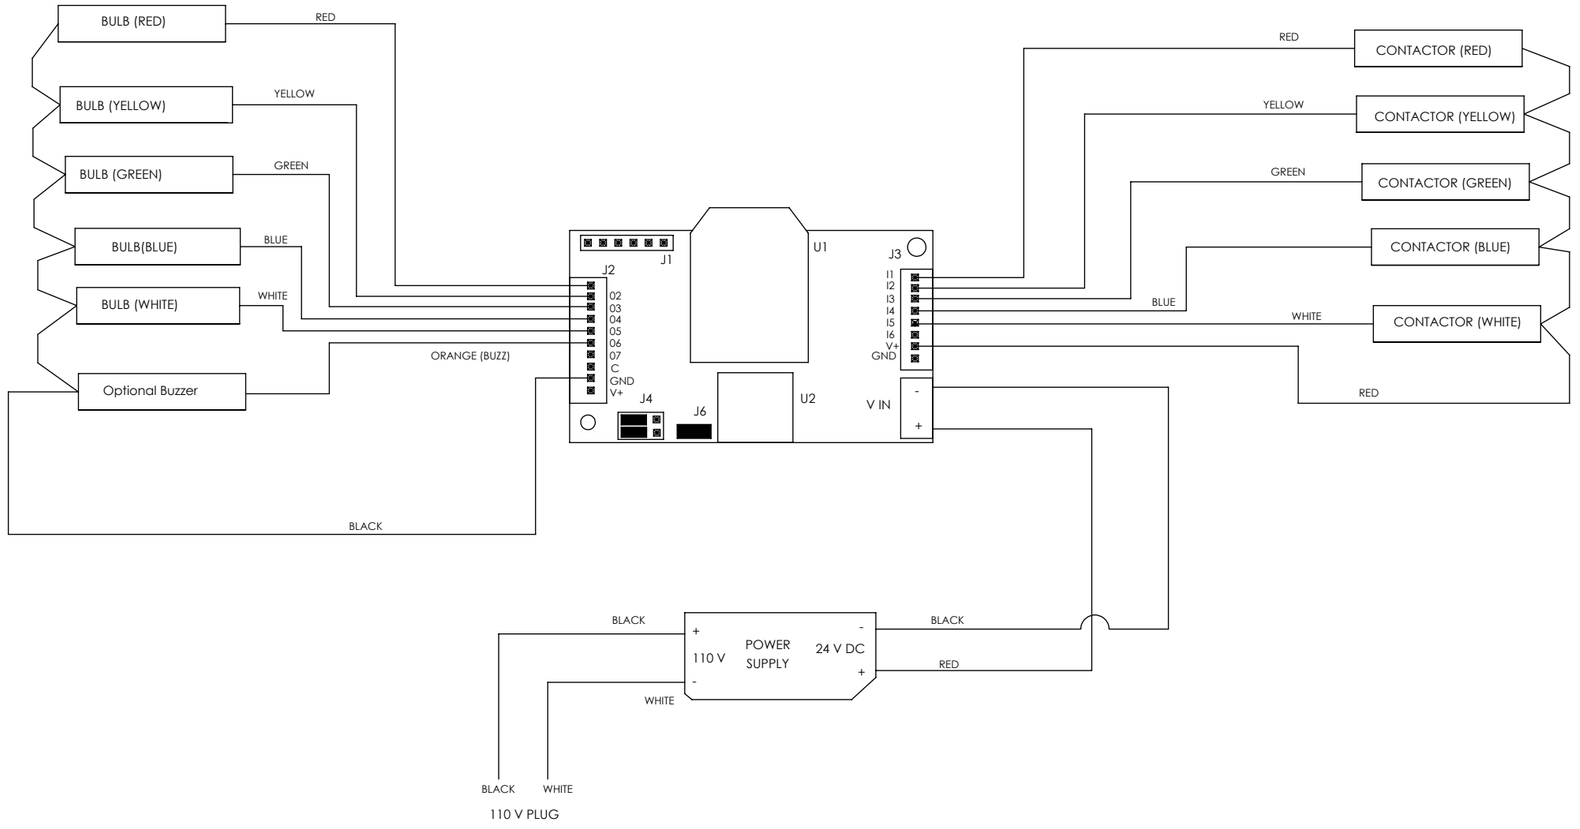


PUSH BUTTONS

DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-B
BATTERY POWERED
TRANSMITTER

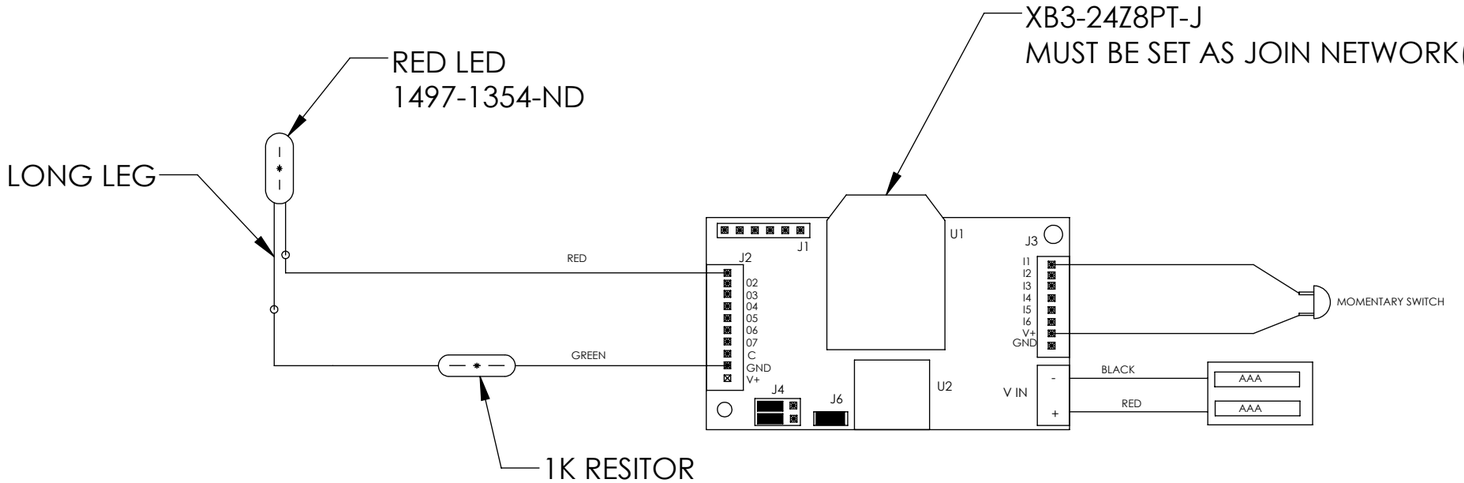


DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.


RC-SL60C
COMBO
WIRELESS LIGHTS - BUTTONS

24V LIGHT

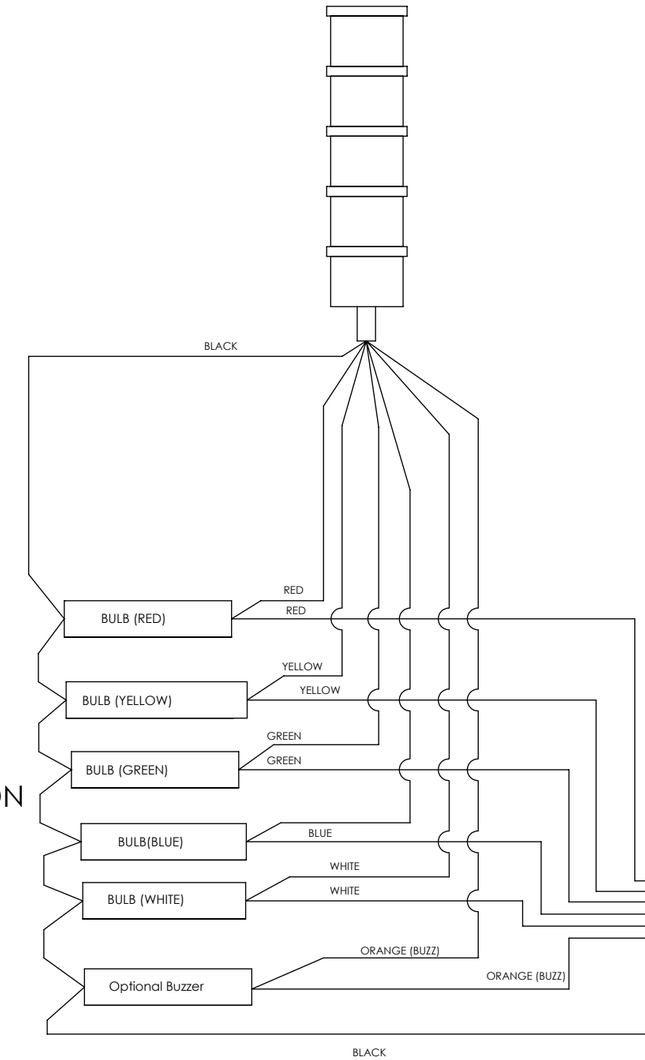


PUSH BUTTON
24V LEDS

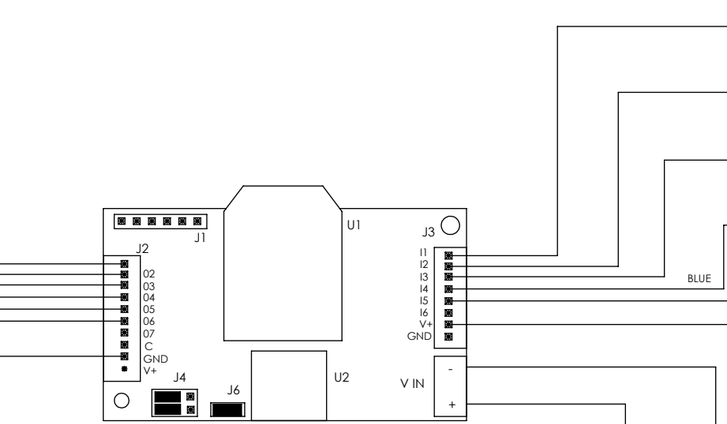

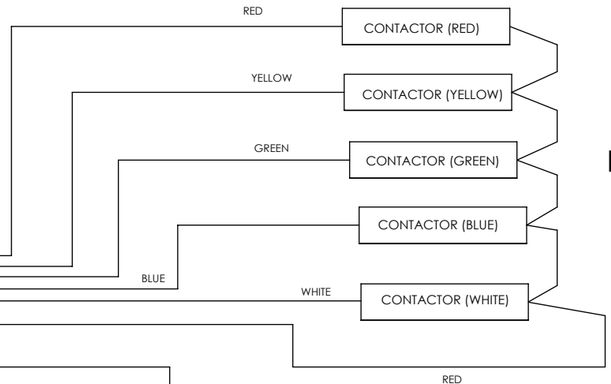


PUSH BUTTONS

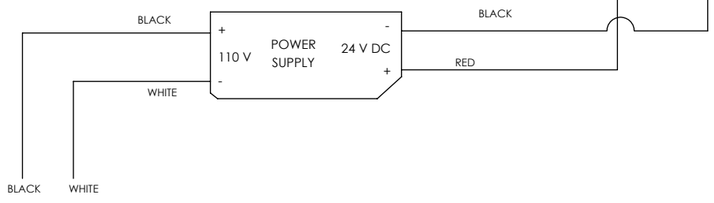

DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-SL60
WIRELESS LIGHT

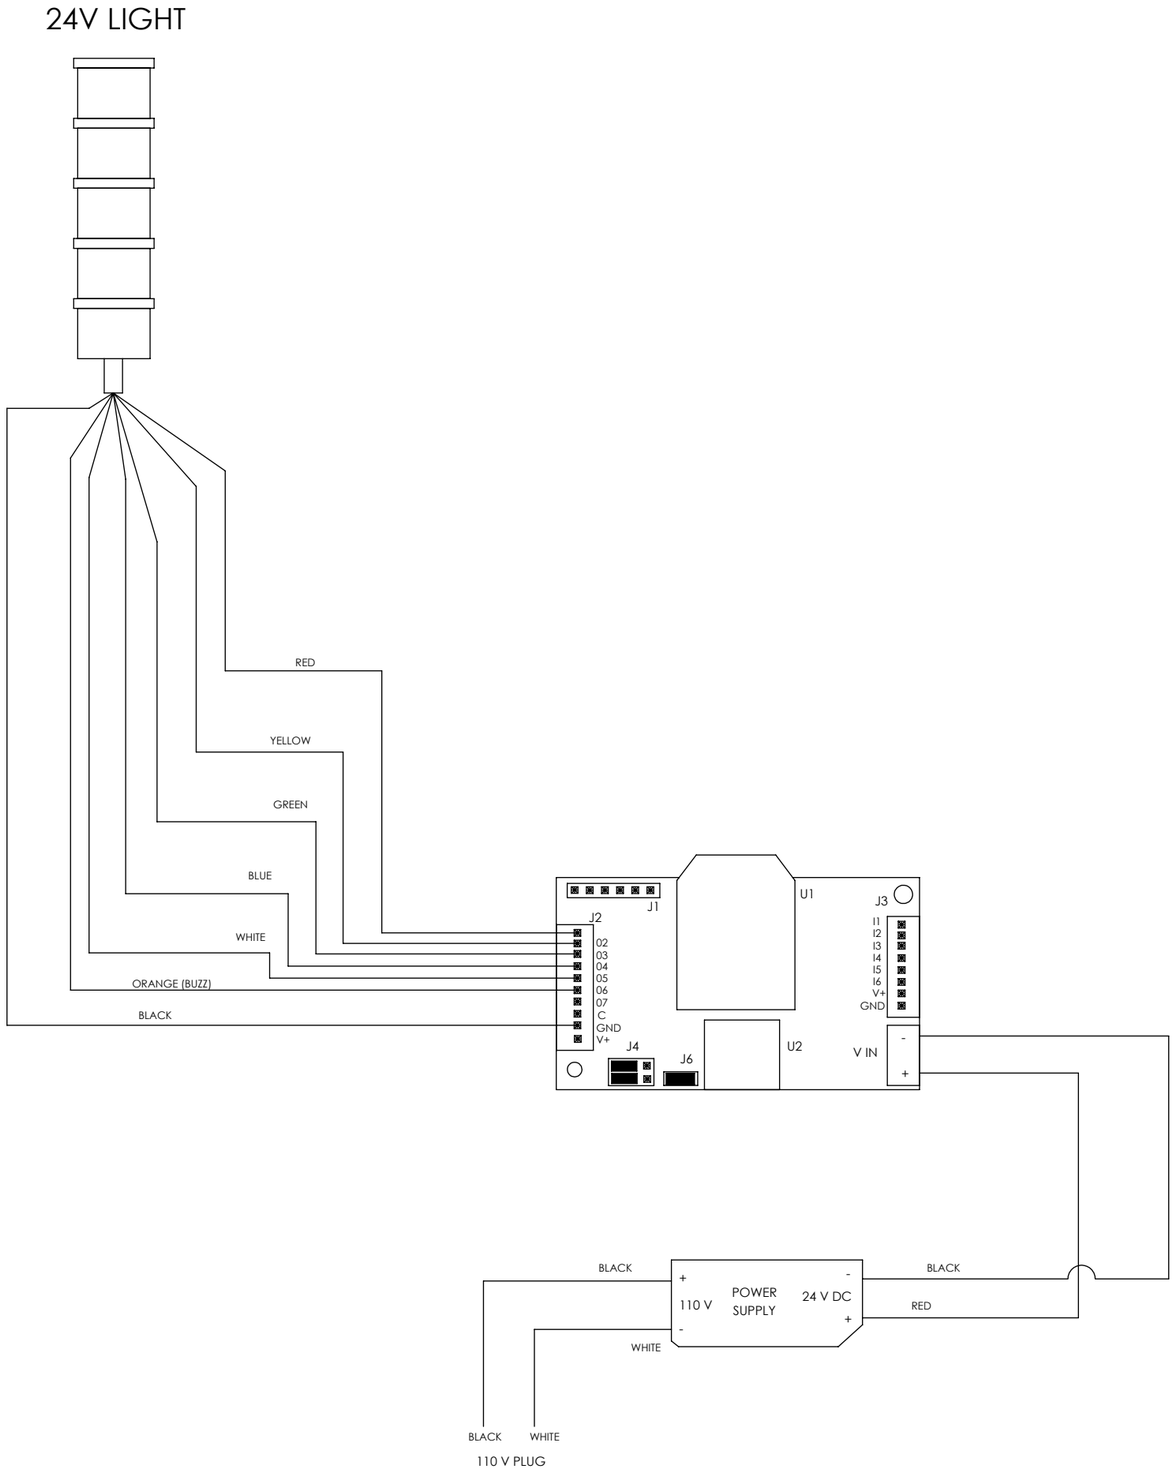

DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-IO-IN-OUT-PS

OUTPUTS


PIN#	COLOR	LIGHT FUNCTION	OUTPUT
1	RED	RED	1
2	BROWN	YELLOW	2
3	GREEN	GREEN	3
4	YELLOW	BLUE	4
5	GREY	WHITE	5
6	PINK	INDICATOR LED	6
7	BLUE		
8	WHITE	GND	

* LIGHT FUNCTIONS
SIGNIFIES NORMAL OPERATION
WHEN UNIT IS PAIRED WITH A WIRELESS LIGHT

OUTPUTS CAN SUPPORT 400mA AC/DC max.

INPUTS

PIN#	COLOR	OUTPUT ACTIVATED	LIGHT FUNCTION
1	BROWN		INPUT +24V
2	BLUE	2	YELLOW LIGHT
3	WHITE		
4	GREEN	3	GREEN LIGHT
5	PINK	5	WHITE LIGHT
6	YELLOW	4	BLUE LIGHT
7	BLACK	2	
8	GRAY	1	RED LIGHT
9	RED		
10	VIOLET		GND
11	ORANGE	6	BUZZER
12	LITE GREEN		

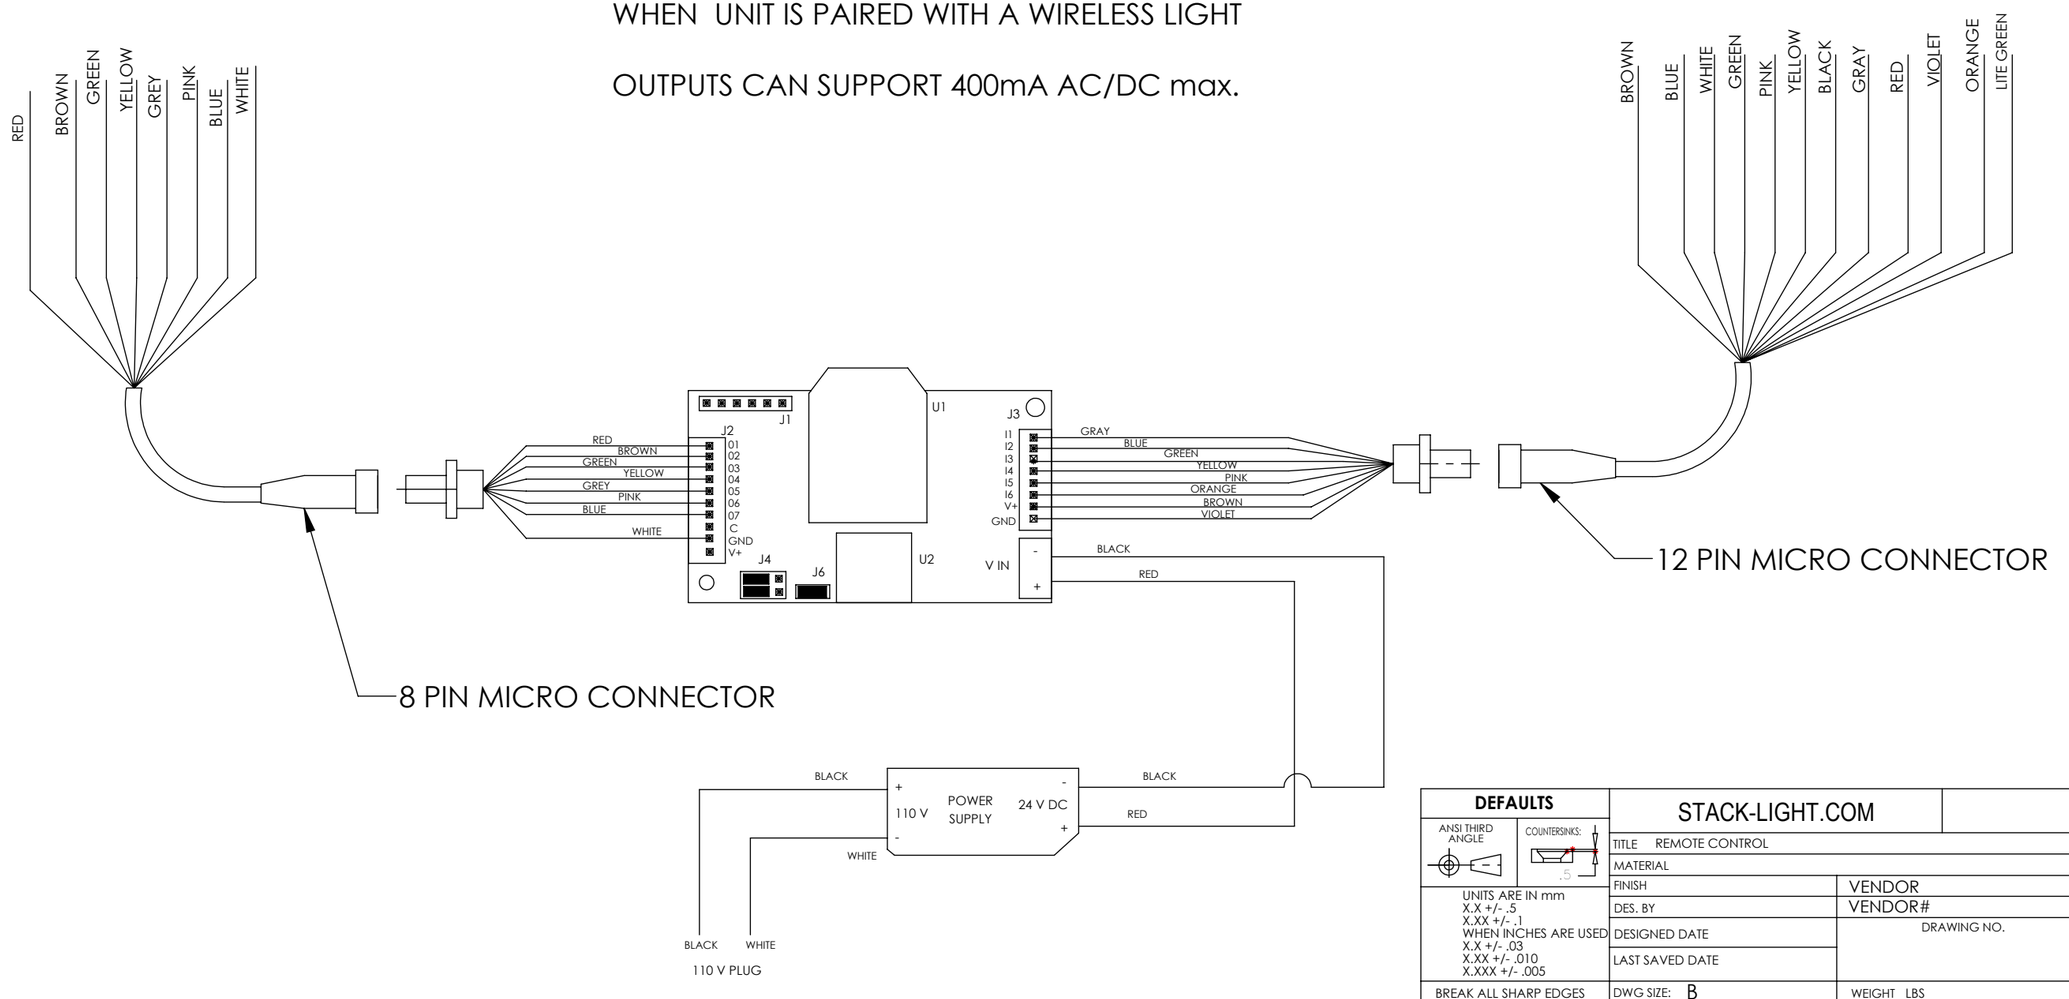

DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-IO-IN-OUT

OUTPUTS


PIN#	COLOR	LIGHT FUNCTION	OUTPUT
1	RED	RED	1
2	BROWN	YELLOW	2
3	GREEN	GREEN	3
4	YELLOW	BLUE	4
5	GREY	WHITE	5
6	PINK	INDICATOR LED	6
7	BLUE		
8	WHITE	GND	

* LIGHT FUNCTIONS
SIGNIFIES NORMAL OPERATION
WHEN UNIT IS PAIRED WITH A WIRELESS LIGHT

OUTPUTS CAN SUPPORT 400mA AC/DC max.

INPUTS

PIN#	COLOR	OUTPUT ACTIVATED	LIGHT FUNCTION
1	BROWN		INPUT +24V
2	BLUE	2	YELLOW LIGHT
3	WHITE		-24V DC
4	GREEN	3	GREEN LIGHT
5	PINK	5	WHITE LIGHT
6	YELLOW	4	BLUE LIGHT
7	BLACK		+24V DC
8	GRAY	1	RED LIGHT
9	RED		
10	VIOLET		GND
11	ORANGE	6	BUZZER
12	LITE GREEN		

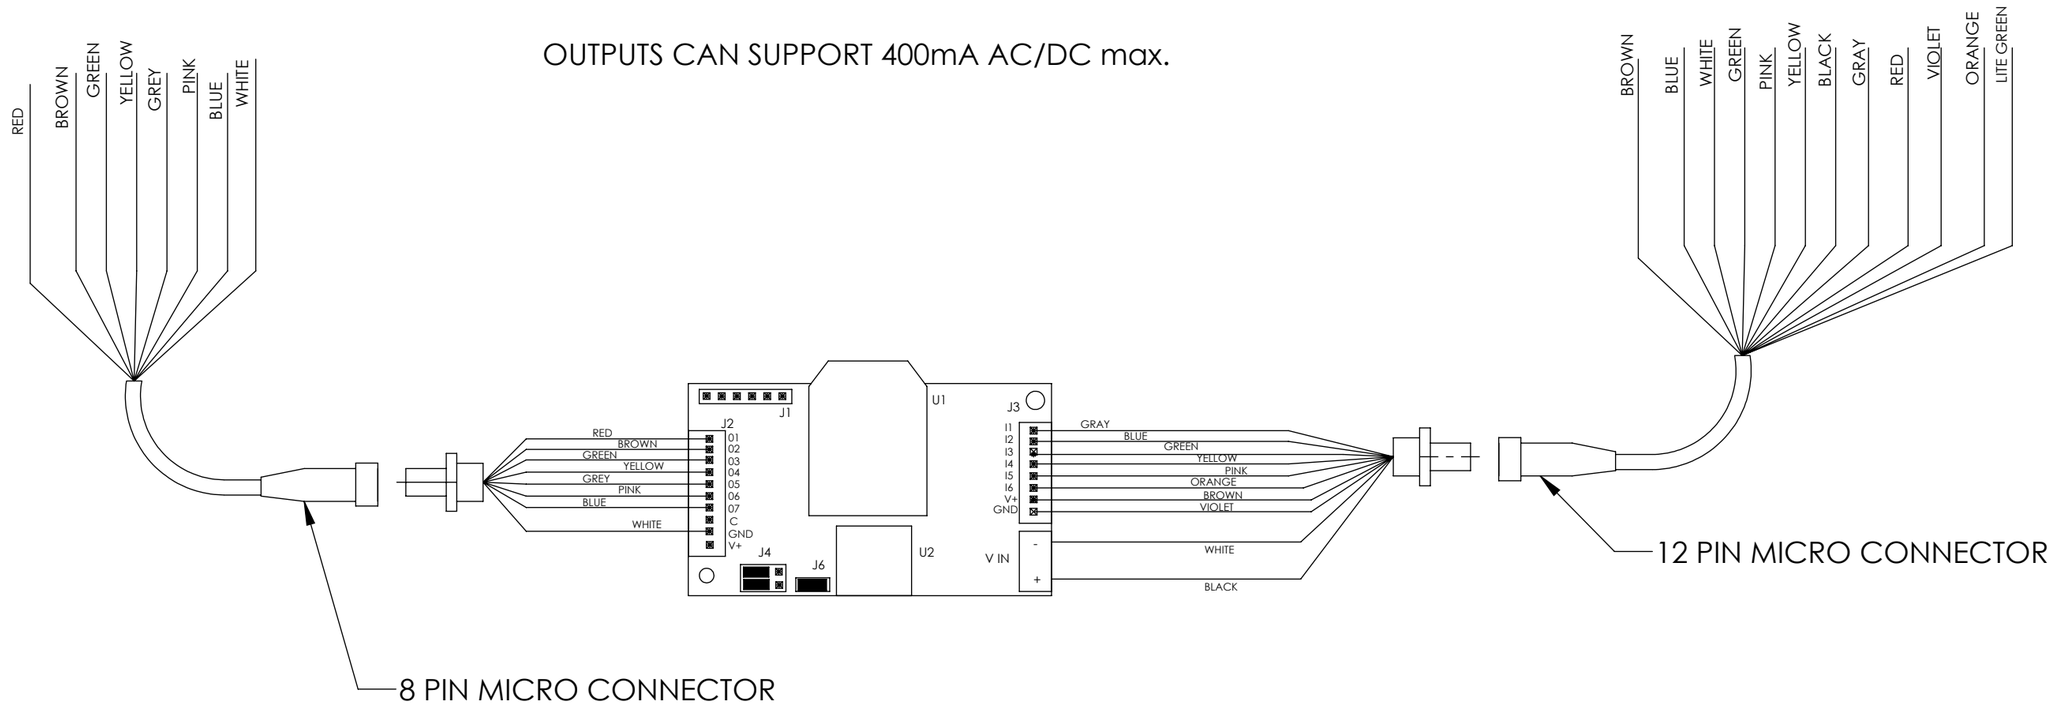

DEFAULTS ANSI THIRD ANGLE COUNTERSINKS: .5 UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	STACK-LIGHT.COM	
	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.


RC-IO-OUT-PS

OUTPUTS

PIN#	COLOR	LIGHT FUNCTION	OUTPUT
1	RED	RED	1
2	BROWN	YELLOW	2
3	GREEN	GREEN	3
4	YELLOW	BLUE	4
5	GREY	WHITE	5
6	PINK	INDICATOR LED	6
7	BLUE		
8	WHITE	GND	

* LIGHT FUNCTIONS
SIGNIFIES NORMAL OPERATION
WHEN UNIT IS PAIRED WITH A WIRELESS LIGHT

OUTPUTS CAN SUPPORT 400mA AC/DC max.

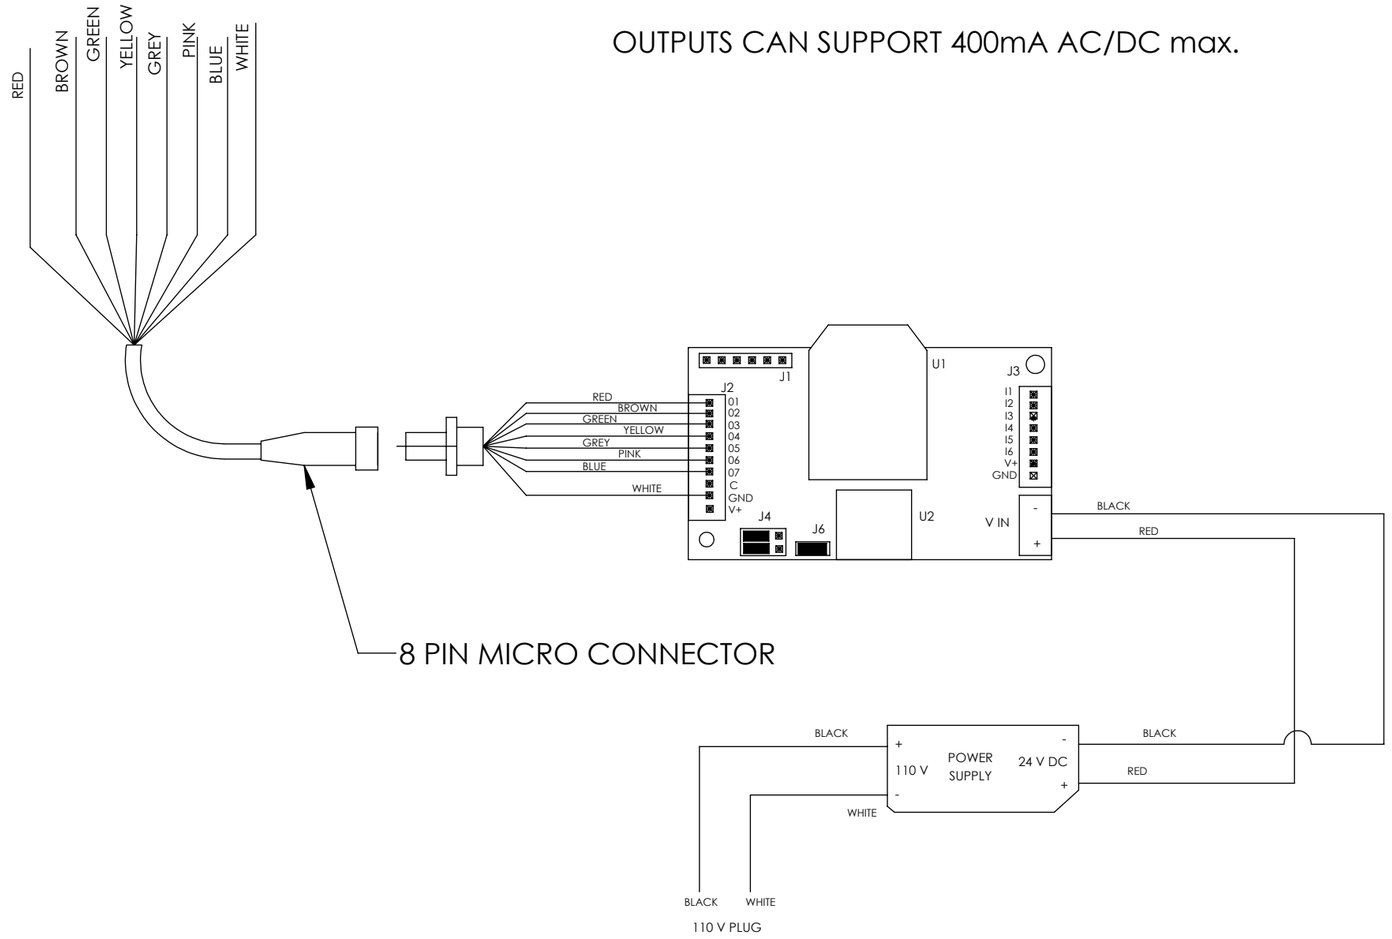


DEFAULTS	STACK-LIGHT.COM		
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL		
	MATERIAL		
	FINISH	VENDOR	
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#	
	DESIGNED DATE	DRAWING NO.	REV
	LAST SAVED DATE		
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-SL60-IO

24V LIGHT

PIN#	COLOR	FUNCTION
1	BROWN	INPUT +24V
2	BLUE	YELLOW LIGHT
3	WHITE	-24V DC
4	GREEN	GREEN LIGHT
5	PINK	WHITE LIGHT
6	YELLOW	BLUE LIGHT
7	BLACK	+24V DC
8	GRAY	RED LIGHT
9	RED	
10	VIOLET	GND
11	ORANGE	BUZZER
12	LITE GREEN	

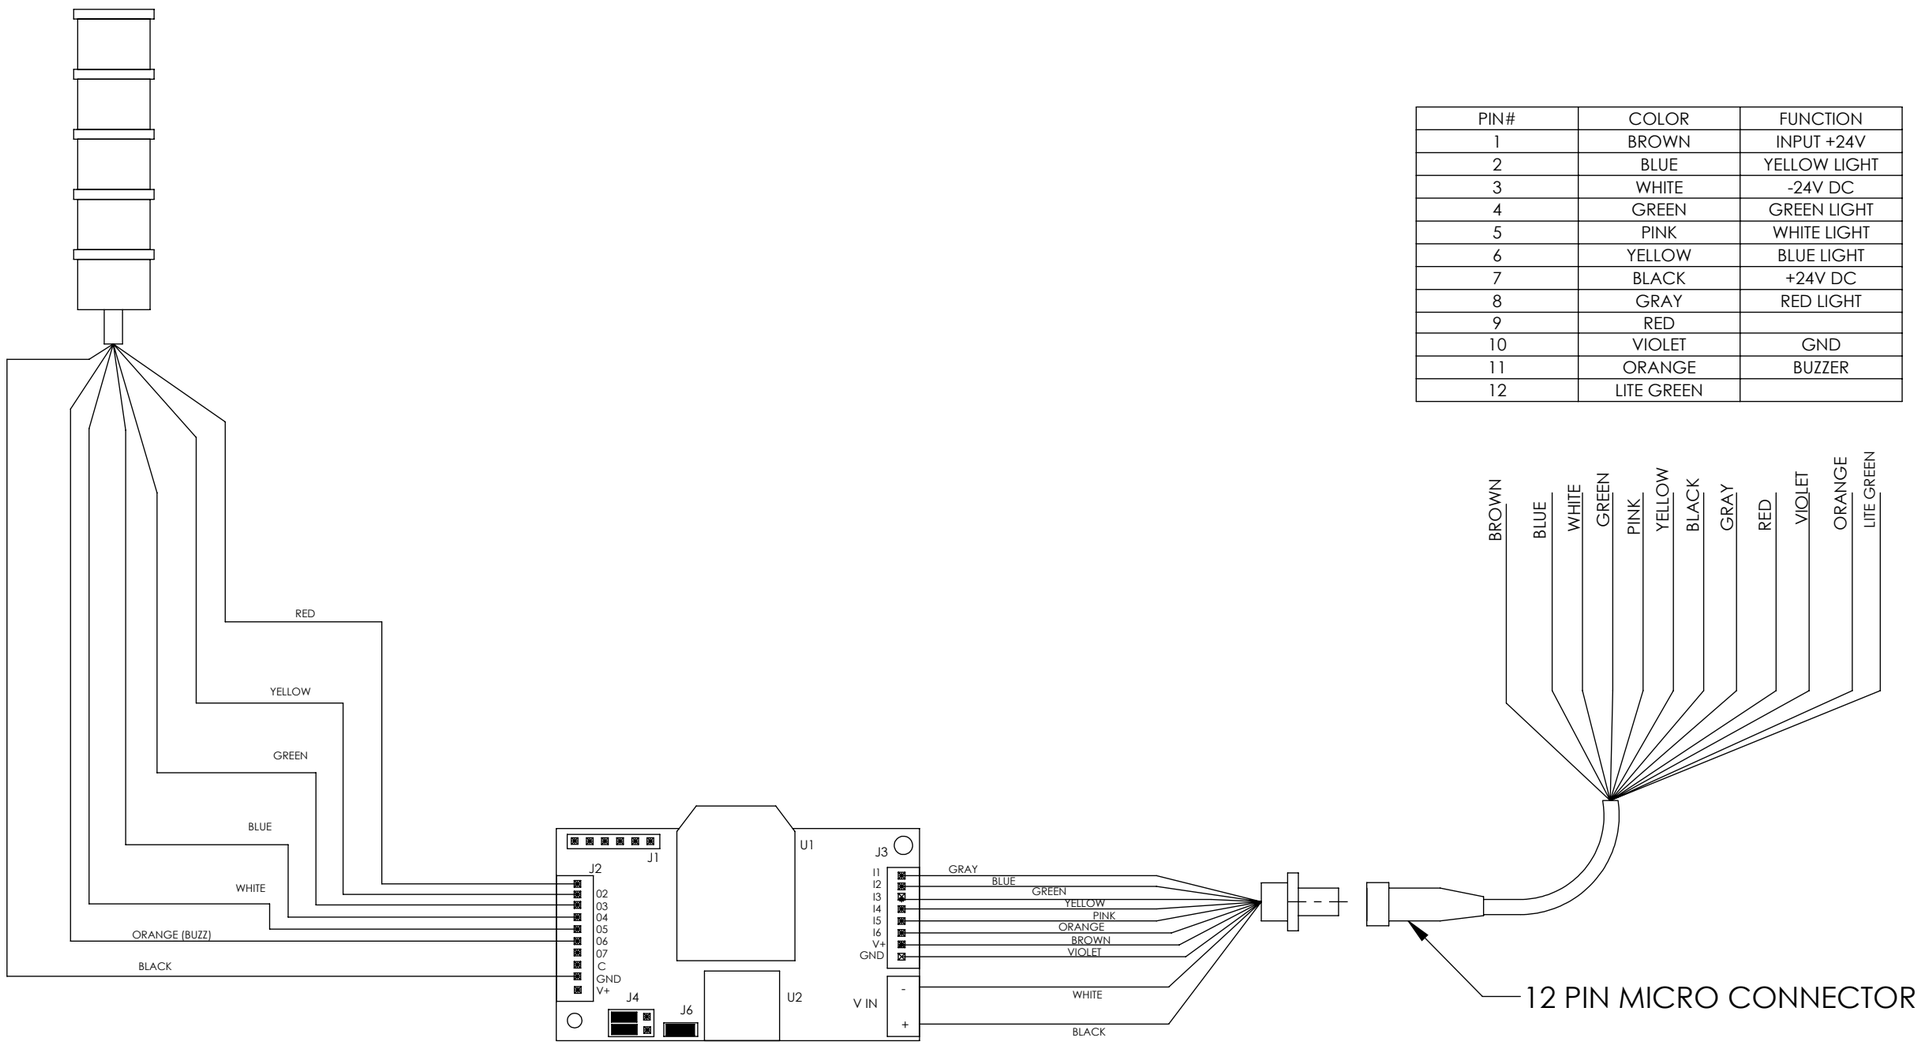


DEFAULTS ANSI THIRD ANGLE COUNTERSINKS: .5 UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	STACK-LIGHT.COM	
	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-SL60-IO-PS

24V LIGHT

PIN#	COLOR	FUNCTION
1	BROWN	INPUT +24V
2	BLUE	YELLOW LIGHT
3	WHITE	
4	GREEN	GREEN LIGHT
5	PINK	WHITE LIGHT
6	YELLOW	BLUE LIGHT
7	BLACK	
8	GRAY	RED LIGHT
9	RED	
10	VIOLET	GND
11	ORANGE	BUZZER
12	LITE GREEN	

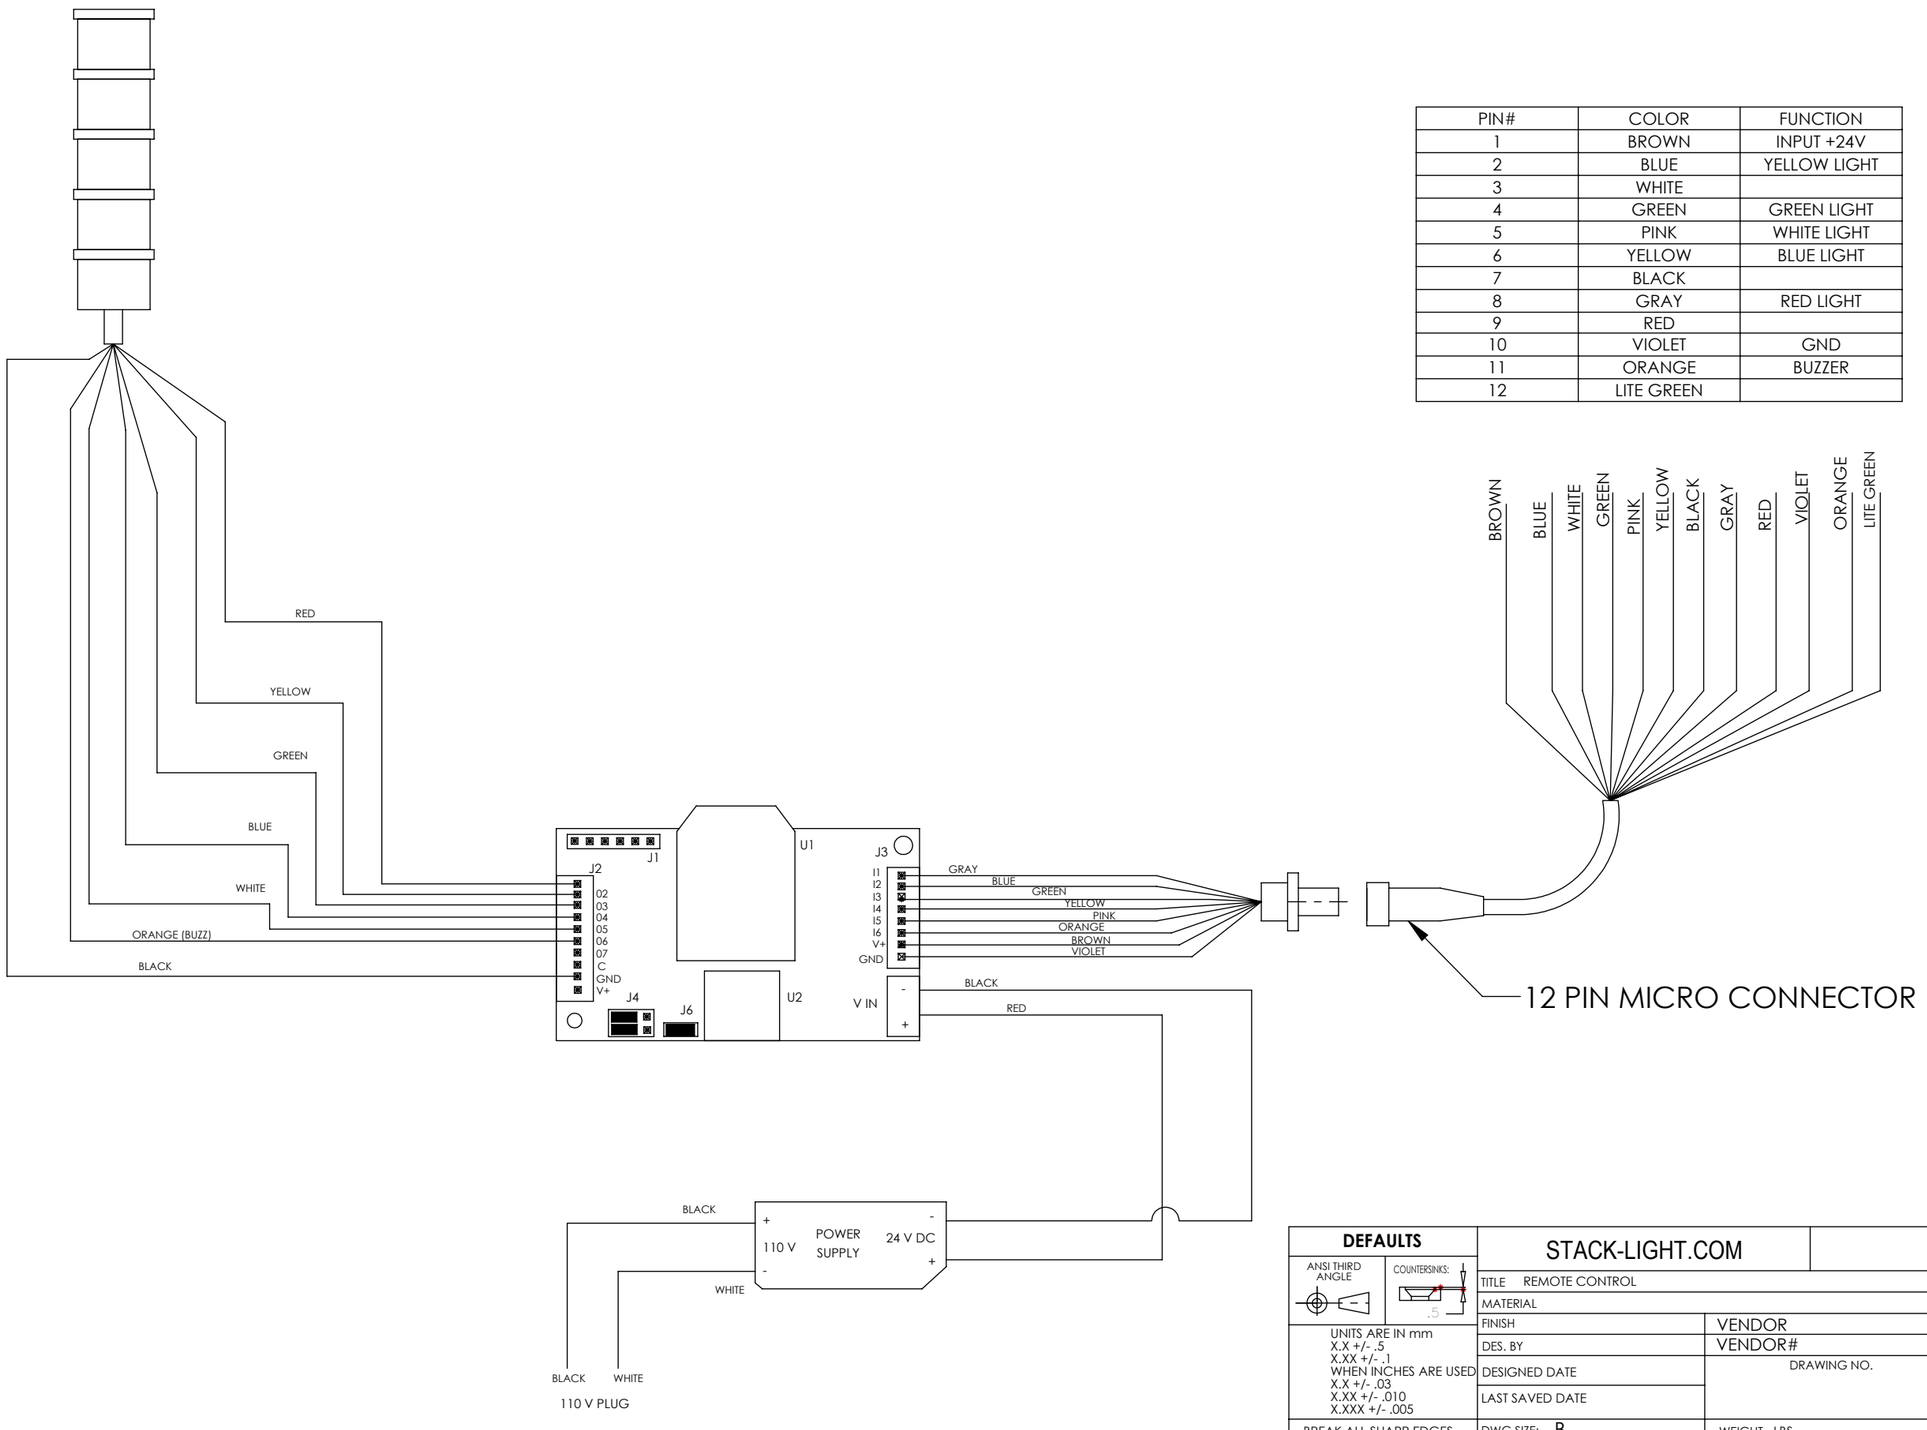


DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-IO-IN-PS

PIN#	COLOR	FUNCTION
1	BROWN	COMMINPUTON
2	BLUE	YELLOW LIGHT
3	WHITE	
4	GREEN	GREEN LIGHT
5	PINK	WHITE LIGHT
6	YELLOW	BLUE LIGHT
7	BLACK	
8	GRAY	RED LIGHT
9	RED	
10	VIOLET	GND
11	ORANGE	BUZZER
12	LITE GREEN	

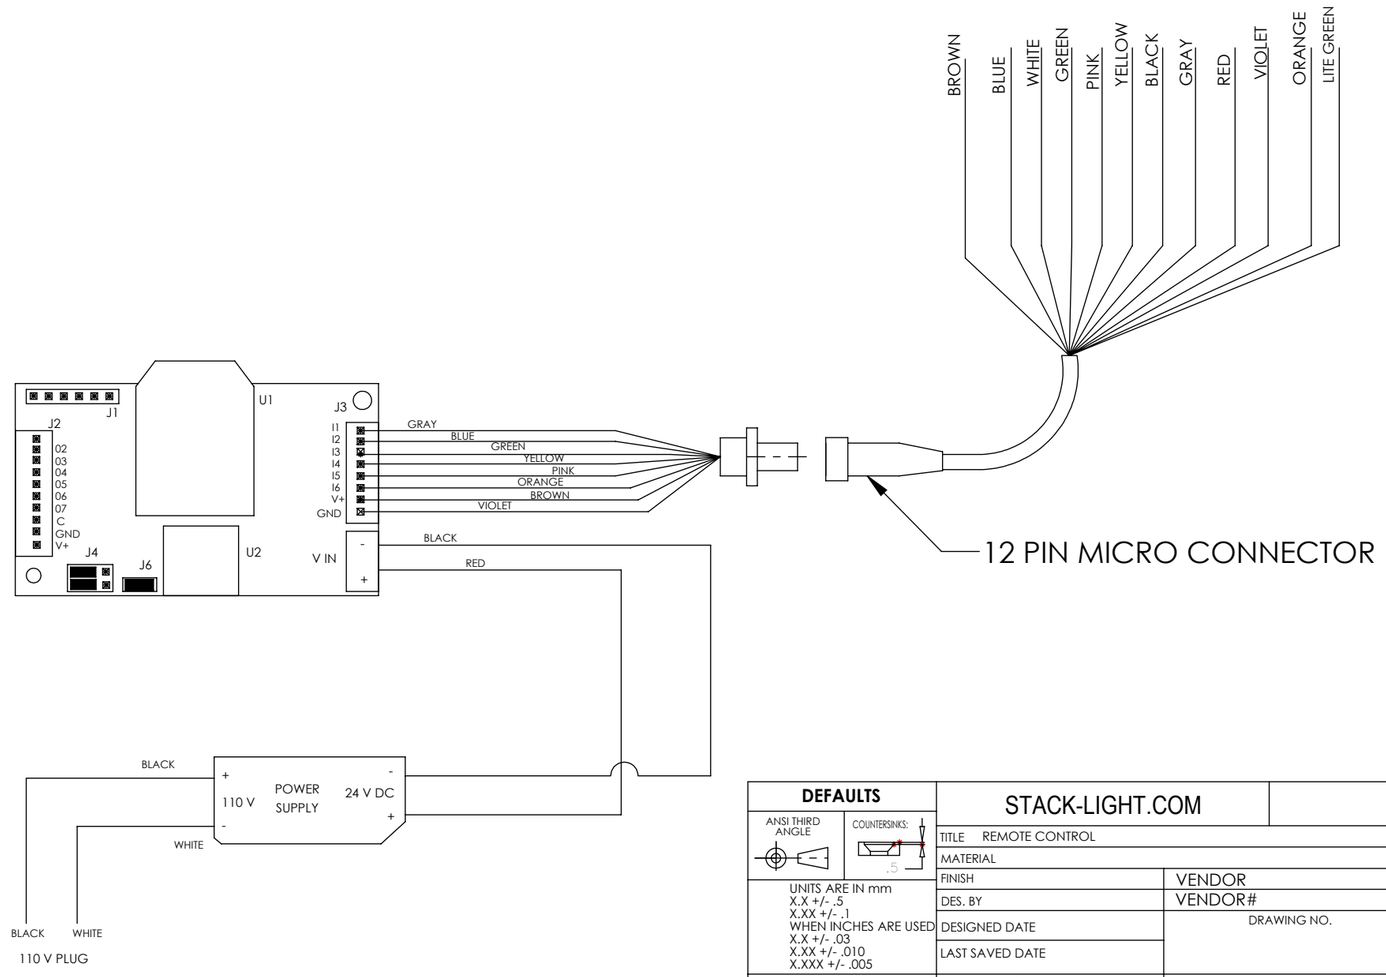

DEFAULTS

ANSI THIRD ANGLE

COUNTERSINKS:

UNITS ARE IN mm
X.X +/- .5
X.XX +/- .1
WHEN INCHES ARE USED
X.X +/- .03
X.XX +/- .010
X.XXX +/- .005

BREAK ALL SHARP EDGES

STACK-LIGHT.COM


TITLE REMOTE CONTROL	
MATERIAL	
FINISH	VENDOR
DES. BY	VENDOR#
DESIGNED DATE	DRAWING NO. / REV
LAST SAVED DATE	
DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

RC-IO-IN

INPUTS

PIN#	COLOR	OUTPUT ACTIVATED	LIGHT FUNCTION
1	BROWN		INPUT +24V
2	BLUE		YELLOW LIGHT
3	WHITE		-24V DC
4	GREEN	3	GREEN LIGHT
5	PINK	5	WHITE LIGHT
6	YELLOW	4	BLUE LIGHT
7	BLACK	2	+24V DC
8	GRAY	1	RED LIGHT
9	RED		
10	VIOLET		COMMON
11	ORANGE	6	BUZZER
12	LITE GREEN		

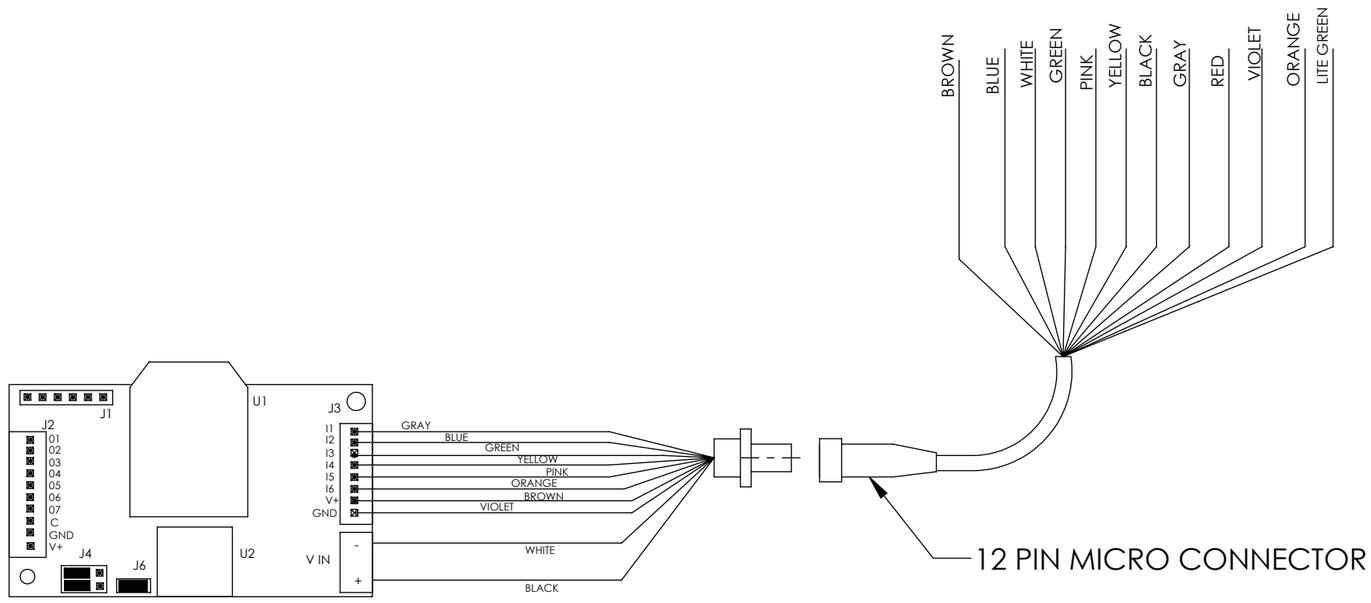


DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE REMOTE CONTROL	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.

SL60-H (110V LIGHT)

ONLY USE FOR SPECIAL 110 V LIGHTS

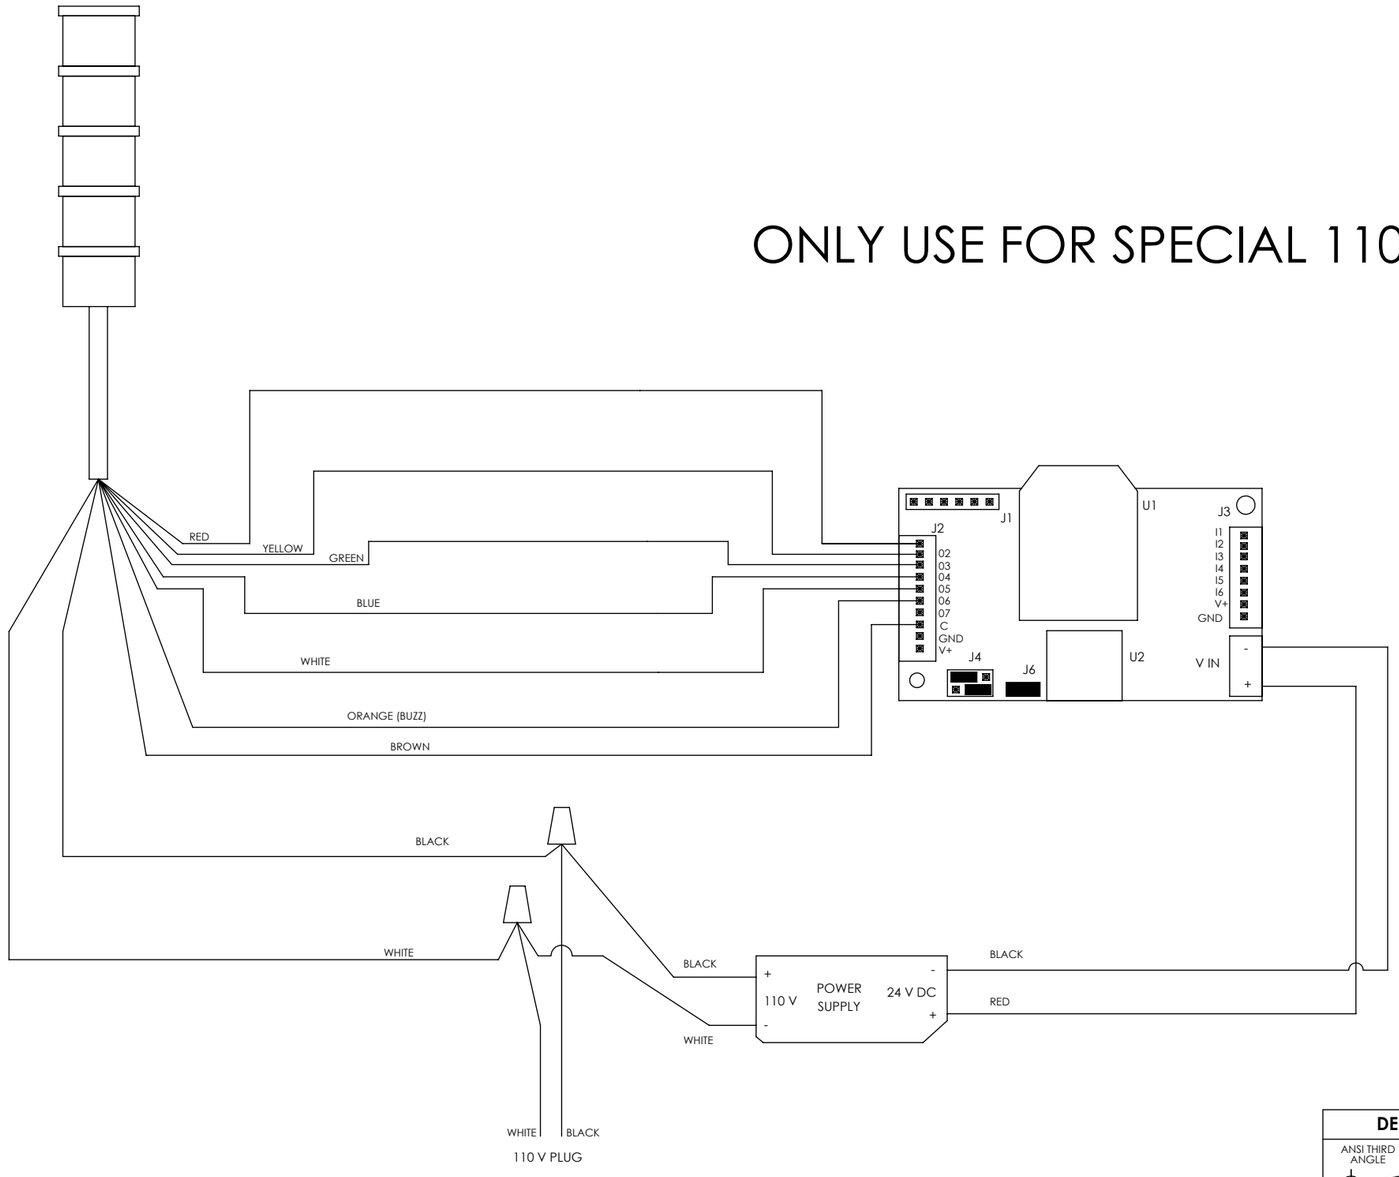

DEFAULTS	STACK-LIGHT.COM	
ANSI THIRD ANGLE / COUNTERSINKS: .5	TITLE WITH STACK-LIGHT	
	MATERIAL	
	FINISH	VENDOR
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005	DES. BY	VENDOR#
	DESIGNED DATE	DRAWING NO. / REV
	LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM.
ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.